


POWERFAB

HYDRAULIC POWER UNIT

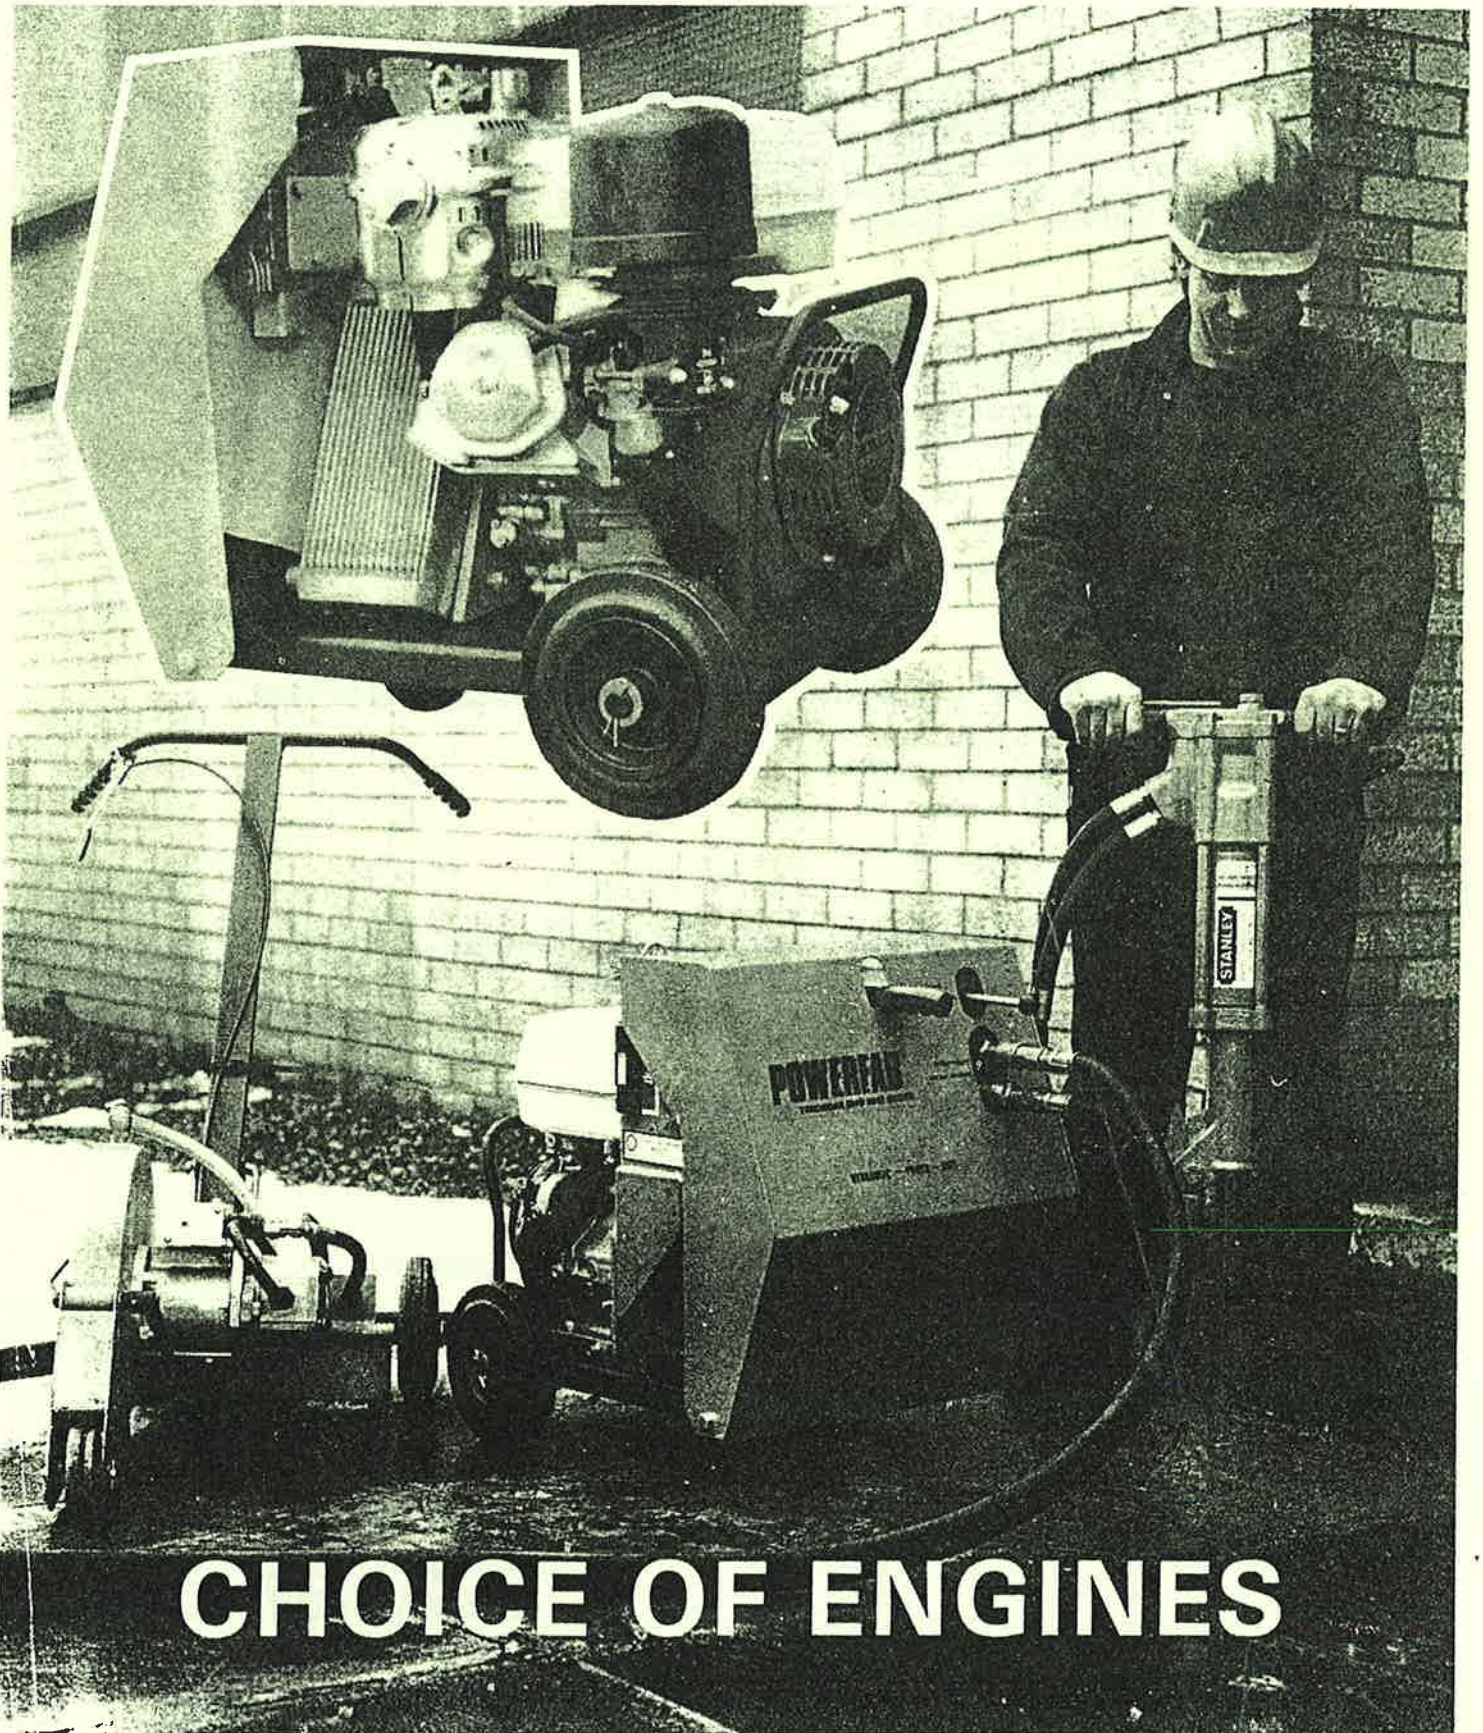

CHOICE OF ENGINES

POWERFAB HYDRAULIC POWER UNIT Specification

A new lightweight "Powerfab" Power Unit, is designed and constructed to give versatility and efficiency and is suitable for all site conditions.

It is of compact design for access to confined areas, also light, portable, simple to work on, and covers a large range of Power Tools.

CONSTRUCTION

- a) Consists of a robust constructed chassis.
- b) Has a hinged canopy for ease of maintenance and service.
- c) Transported on rubber wheels (200 Ø).
- d) Uses a forced air cooling system to maintain low oil working temperature.
- e) Hydraulic Tank capacity 1.5 gallons (6.75 ltr)

HYDRAULIC SYSTEM

Has a flow 28.5 Stet. L.P.M. Maximum, working pressure 2000 P.S.I.
Maximum at 3600 R.P.M.
Other flows and pressures are available on request. Flow up to 28 L.P.M.
working pressure 1800 P.S.I.

FILTRATION

Consists of a return line filter 25-30 micron rating absolute Suction Strainer - 125 micron rating.

ENGINES AVAILABLE

	H.P.	R.P.M.	HAND	ELECTRIC	HAND & ELECTRIC
Honda Petrol	11	3600	✓	✓	✓
Robin Diesel	8.4	3600	✓	✓	✓
Petter Diesel	7.5	3600	✓	✓	✓

SPECIFICATION

Overall Length (25½) (648mm) Overall Width (19½)(495mm)
Height (23¾) (603mm) Weight 89kg. (dry weight)

POWER TOOLS:-

A variety of tools can be operated with the Power Unit including:-

Demolition Hammer	Rotary Drill
High Speed Disc Cutter	Post Hole Borer
Water Pump	Chain Saw
Reversible Drill	& Numerous Accessories
Impact Wrench	
Angle Grinder	

Your Powerfab Distributor.

POWERFAB
SALES & SPARES LIMITED

FAIR VIEW, ASHVALE,
TREDEGAR, GWENT NP2 3HA,
UNITED KINGDOM.
TELEPHONE: 049525-6627.
TELEX: 498973 POWFAB G.